




MVA 1420-32-IL

Inline Spiral Silencer

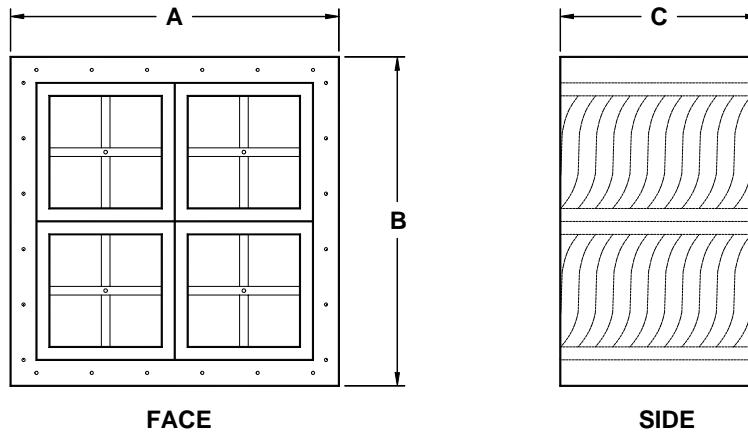

MVA 1420-4-IL SHOWN; REFER TO DIMENSIONS TABLE FOR DIMENSIONS AND NUMBER OF MODULES

Dimensions					
Module Grid	A = Width	B = Height	C = Length	Face Flow I.D.	Net Weight
4 X 8	70 in.	134 in.	23 in.	64 in. X 128 in.	1260 lbs.

DYNAMIC INSERTION LOSS

Octave Bands	1	2	3	4	5	6	7	8
Center Freq. Hz	63	125	250	500	1000	2000	4000	8000
Face Velocity	Dynamic Insertion Loss in Decibels							
-4000	18	22	26	34	35	40	55	57
-3000	18	22	26	33	34	40	54	56
-2000	17	21	25	33	34	40	54	56
-1000	17	21	25	33	34	39	54	56
+1000	17	21	25	33	34	39	53	56
+2000	17	21	24	33	34	39	53	55
+3000	17	21	24	33	33	39	53	55
+4000	16	21	24	33	33	39	53	55

AERODYNAMIC PERFORMANCE DATA

Static Pressure Loss in Inches of H ₂ O										
	.05	.10	.15	.20	.25	.30	.40	.50	.75	1.00
Airflow in CFM	22400	40640	64640	78560	97600	115840	131200	150400	172000	180480

Tel: (909) 796-6200



Fax: (909) 796-6223



MVA1420-32-IL

SELF GENERATED SOUND RATINGS

Forward Flow								
Octave Bands	1	2	3	4	5	6	7	8
Center Freq. Hz	63	125	250	500	1000	2000	4000	8000
Face Velocity	Generated Sound in Sound Power Level (Lw) (dB re 10 ⁻¹² Watts)							
1000	(53)	(40)	(30)	(22)	(18)	(19)	(24)	(28)
2000	(54)	(41)	41	42	42	41	(25)	(28)
3000	58	44	42	43	44	42	34	40

Reverse Flow								
Octave Bands	1	2	3	4	5	6	7	8
Center Freq. Hz	63	125	250	500	1000	2000	4000	8000
Face Velocity	Generated Sound in Sound Power Level (Lw) (dB re 10 ⁻¹² Watts)							
1000	(53)	(40)	(30)	(22)	(18)	(19)	(24)	(28)
2000	(54)	(41)	41	42	42	41	(25)	(28)
3000	58	44	42	43	44	42	34	40

NOTE: Sound power levels in parentheses have reached ambient levels in the test facilities test room or are determined by instrument limitations. Actual levels are less than or equal to levels indicated.

The above insertion loss values and self generated sound levels are extrapolated from actual test data from an independent testing facility per ASTM E477 "Standard Methods of Testing Duct Liner Materials and Prefabricated Silencers for Acoustical and Airflow Performance". Test reports available upon request.