




VA 1010-1S-IL

Inline Spiral Silencer

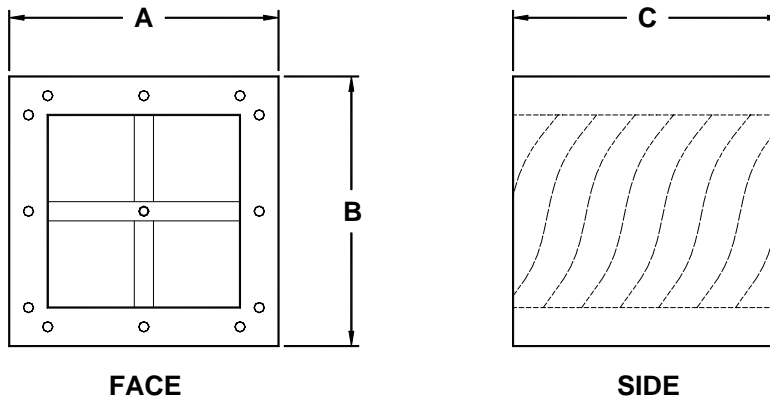

Dimensions				
A = Width	B = Height	C = Length	Face Flow I.D.	Net Weight
14 in.	14 in.	14 in.	10 in. X 10 in.	29 lbs.

DYNAMIC INSERTION LOSS

Octave Bands	1	2	3	4	5	6	7	8
Center Freq. Hz	63	125	250	500	1000	2000	4000	8000
Face Velocity	Dynamic Insertion Loss in Decibels							
-4000	18	25	33	37	38	46	54	57
-3000	17	25	32	36	37	45	54	57
-2000	17	25	32	36	37	45	54	57
-1000	17	25	32	36	37	45	54	57
+1000	17	25	32	36	37	45	54	57
+2000	16	23	31	35	36	46	55	57
+3000	16	23	31	35	36	46	55	57
+4000	16	23	31	35	36	46	55	57

AERODYNAMIC PERFORMANCE DATA

Static Pressure Loss in Inches of H ₂ O										
	.05	.10	.15	.20	.25	.30	.40	.50	.75	1.00
Airflow in CFM	370	660	1040	1230	1305	1770	2140	2450	2800	2950

Tel: (909) 796-6200



Fax: (909) 796-6223



VA 1010-1S-IL

SELF GENERATED SOUND RATINGS

Forward Flow								
Octave Bands	1	2	3	4	5	6	7	8
Center Freq. Hz	63	125	250	500	1000	2000	4000	8000
Face Velocity	Generated Sound in Sound Power Level (Lw) (dB re 10 ⁻¹² Watts)							
1000	(53)	(40)	(30)	(22)	(18)	(19)	(24)	(28)
2000	(54)	(41)	41	42	42	41	(25)	(28)
3000	58	44	42	43	44	42	34	40

Reverse Flow								
Octave Bands	1	2	3	4	5	6	7	8
Center Freq. Hz	63	125	250	500	1000	2000	4000	8000
Face Velocity	Generated Sound in Sound Power Level (Lw) (dB re 10 ⁻¹² Watts)							
1000	(53)	(40)	(30)	(22)	(18)	(19)	(24)	(28)
2000	(54)	(41)	41	42	42	41	(25)	(28)
3000	58	44	42	43	44	42	34	40

NOTE: Sound power levels in parentheses have reached ambient levels in the test facilities test room or are determined by instrument limitations. Actual levels are less than or equal to levels indicated.

The above insertion loss values and self generated sound levels are extrapolated from actual test data from an independent testing facility per ASTM E477 "Standard Methods of Testing Duct Liner Materials and Prefabricated Silencers for Acoustical and Airflow Performance". Test reports available upon request.