


Absorption Panels

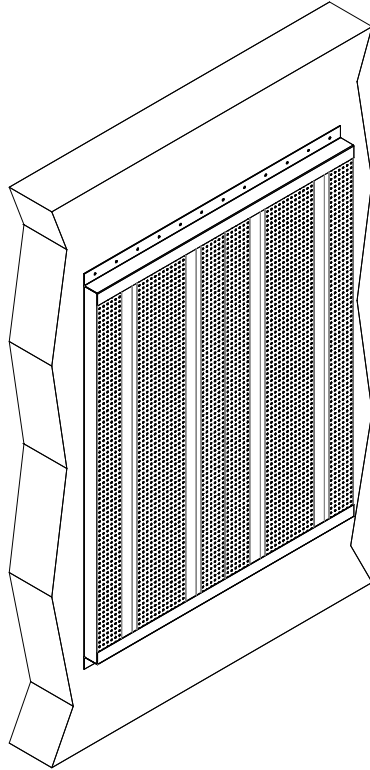

Features

- Galvanized construction for long life
- All panels are filled with six pounds per cubic foot density mineral rock wool which is vermin and moisture proof, will not promote growth of fungi or bacteria, and is non-hygroscopic. This makes them ideal for placement in harsh environments while providing a minimum NRC value of 1.05
- Modular design allows for easy installation
- The finished panel system may be factory powder coated with several standard colors
- Perf face is 3/8" dia holes on staggered pattern
- Available in various materials depending on application

Sound Absorption Coefficient Table

1/3 Octave Center Center Freq. (HZ)	Absorption Coefficient	Total Absorption In Sabins
100	0.21	14.96
125	0.36	25.93
160	0.45	32.26
200	0.67	48.21
250	1.01	72.51
315	1.20	86.75
400	1.22	87.65
500	1.23	88.40
630	1.24	88.96
800	1.21	86.76
1000	1.14	82.14
1250	1.11	79.66
1600	1.05	75.26
2000	1.02	73.74
2500	.92	66.31
3150	.84	60.14
4000	.78	56.01
5000	.74	53.26
NRC=1.10		

