




High Velocity/High Impact Silencer

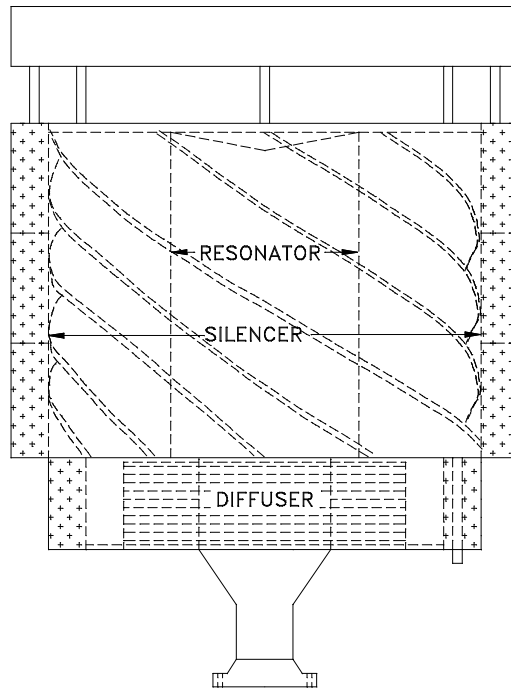

Features

- High attenuation
- Low back pressure
- Optional mobile cart allows easy hookup and movement for safety valve test stands
- Quick connect with optional adapters for any size valve
- Can be provided with 125/150 lb flanges
- May be installed in a fixed location or connected to test valve with piping
- Usable on steam, gas or air
- Durable epoxy powder coated finish
- Compact design
- Minimal weight

APPLICATIONS:

- SAFETY VALVE TEST STANDS
- STEAM BLOW DOWN
- GAS DISCHARGE

MODEL NUMBER

	SV-1000	SV-1500	SV-3000	SV-4000
RATING (PSI)	1000 psi	1500 psi	3000 psi	4000 psi
MAX TEMP	1000° F	1000° F	1000° F	1000° F
SIZE (dia x length)	24" x 24"	30" x 30"	36" x 36"	48" x 36"
WEIGHT (less adapters)	175 lbs	200 lbs	250 lbs	310 lbs

Insertion Loss (db) at 3'

Octave Band Center Frequency (Hz)

1	2	3	4	5	6	7	8
63	125	250	500	1000	2000	4000	8000
18	25	30	40	50	53	62	62

